



SHIELD SECURITY DOORS

TEL

1-866-639-1507

EMAIL

info@shieldsecuritydoors.com

WEB

www.shieldsecuritydoors.com

SHIELD EMBASSY SERIES

Designed for locations at high risk of forced entry

The Shield Embassy series door is designed to help create a secure environment for locations with elevated threat profiles or security challenges. Its 3-inch thick door leaf, patented design, and unique security features are the result of years of research, development, and testing against a wide variety of burglary methods. It was tested at the renowned IFT Rosenheim laboratory in Germany and was awarded a Security Class 3 (RC 3) rating according to EN 1627.

TECHNICAL SPECS

- Door constructed from 22 gauge galvanized steel
- Frame constructed from 16 gauge galvanized steel
- Armored multi-point locking system with up to 20 locking points $\frac{3}{4}$ " \varnothing
- Lock encased in drill resistant manganese
- Door thickness: 3" (75mm)
- Frame thickness: 4" (100mm)
- 30 minute fire rating - **optional**
- Welded, adjustable ball bearing security hinges
- $\frac{1}{2}$ " (12mm) thick decorative panels
- 2" of rock wool for sound and thermal insulation
- Door is pre-hung to the frame
- L-shaped frame profile that protects locking
- Frame is secured in the wall using 16 bolts protected by 1" steel shims
- Inswing or outswing
- Unlimited design and glass options



HARDWARE

- High security bump and pick resistant Mul-T-Lock cylinders
- Drill resistant cylinder defenders
- Available lock options: Mottura 85 series (mechanical) or Fiam X1R (motorized)
- Lockout function - **optional** with mechanical lock only

DIMENSIONS

- Height: up to 110" (depending on decorative panels)
- Width: up to 49"
- Inswing or outswing

FE TESTING EN 1627



OUTSWING TEST



INSWING TEST



SHIELD SECURITY DOORS

TEL

1-866-639-1507



EMAIL

info@shieldsecuritydoors.com

WEB

www.shieldsecuritydoors.com

CROSS SECTIONS

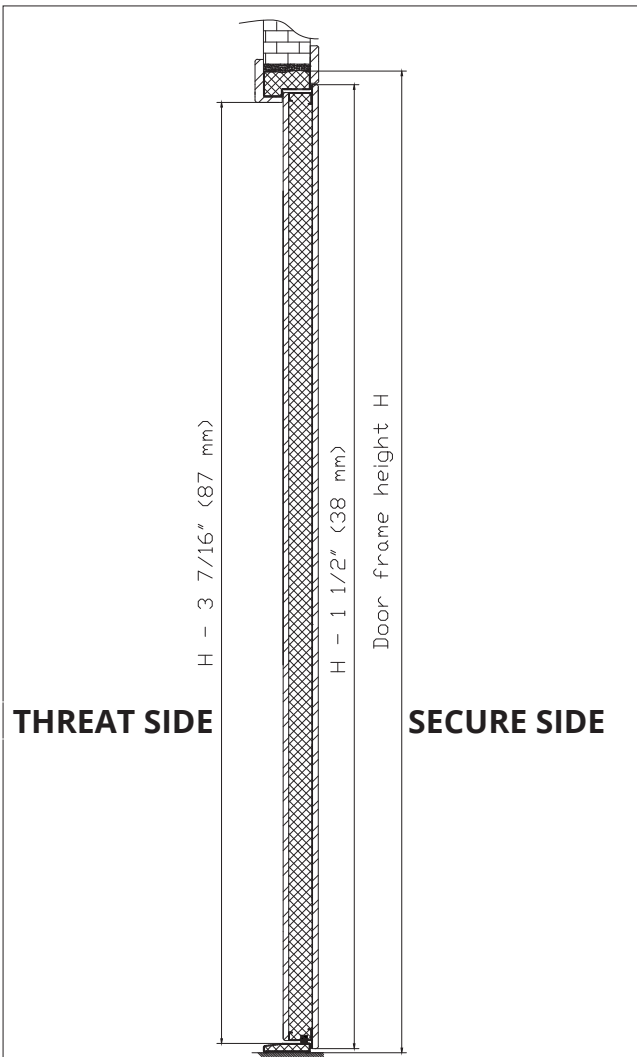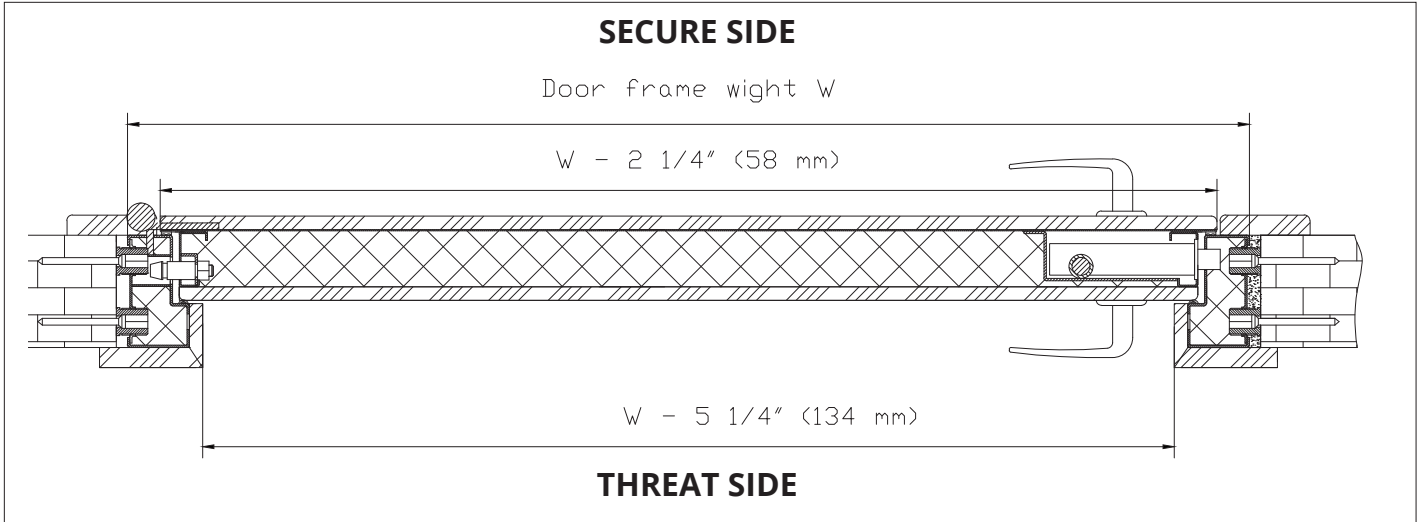

INSTALLATION FAQ

- The Shield Embassy series comes as a pre-hung door set and includes frame, locks, cylinders, handles, hinges, and hardware.
- It can be installed by any licensed GC or door installer.
- No specialized training or tools required!
- A 1/2" to 3/4" gap is required on all sides between the frame and wall (rough opening).
- The Shield Embassy series frame is designed to adapt to crooked walls and openings.
- For detailed instructions, download our installation manual.