

General Information

Designed for the most demanding applications our Mirror Vault Door is the perfect solution for panic rooms, valuable storage, or gun rooms.

While it looks like a typical full length mirror, it offers all the security benefits of a heavy-duty vault door that can withstand intense physical attacks. Optional ballistic armor stops handgun and rifle fire.

Our extensive experience and industry leading hardware provides superior concealment, security, and quality. Every door is backed by our Anti-Burglary Guarantee.

Features

- 12 active locking pins and 8 passive locking pins for extreme forced entry resistance.
- · Secure RFID access system.
- Battery fallback system ensures door operates even during power outages.
- Manual lock release on the interior means you can never be locked in accidentally
- Pre-hung and tested. No wiring or assembly required.
- Two year warranty on parts and materials. Longest in the secret door industry.
- Unlimited phone and video support.
 Expert advice before, during, and after installation.
- Left or right hinged. Symmetrical design installs in either configuration.
- · Robust painted finish on all metal parts.

Available Options

- · UL 3 or UL 8 ballistic armor
- · Face frame material choices
- · Face frame finish choices







Face Frame Materials



American Hard Maple

Recommended for painted finishes.



Clear Alder

Recommended for painted or stained finishes.

Face Frame Finishes



Unfinished: Apply your own finish Sanded and ready to accept a finish.



Stained: *Light, Medium, Dark, Match* Hand applied stain with sprayed satin topcoat.



Painted: White, Gray, Black, Match High quality precatalyzed lacquer.

Wall Condition Requirements

The door must be installed in a wall opening that is plumb and level. The jamb must be a hard surface (IE, concrete, wood,) and free of humps or bellies.

It is also recommended to use a level on the face of the wall surrounding the opening and verify that the surfaces are flat.


The door requires a standard 110V AC outlet be located within 5' of the door opening on the inside of the secret room.

NOTE: The final quality of the concealment and function of the door depends heavily on the quality of the door opening. For best results, correct any wall or floor issues before beginning your installation.

Additional Customization

If you require additional customization beyond what is available on our website, please contact us for availability and a no-obligation price quote.


Phone: 480-926-1742 Email: contact@hiddendoorstore.com

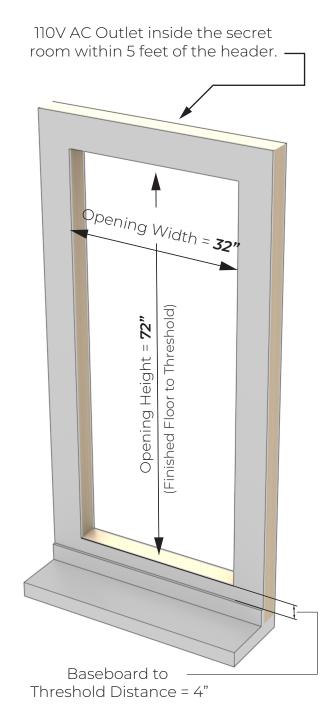




Front View - Closed


Front View - Open

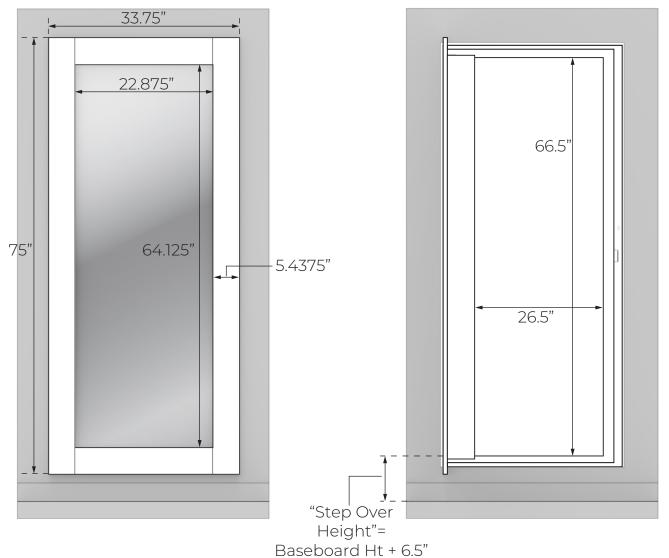

Top View - Closed

Top View - Open

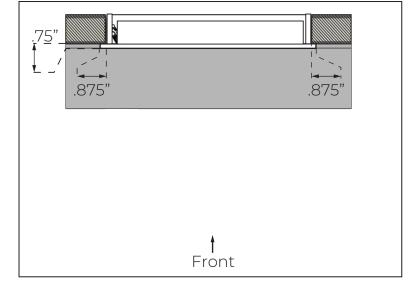

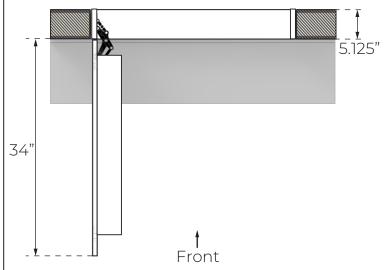



UL 752 Ballistic Standards

The chart below outlines the ballistic standards set forth by Underwriters Laboratories UL 752. The available Ballistic Rating options meet or exceed UL Level 3 or 8, as shown below.

UL LEVEL	AMMUNITION	GRAINS	FPS	SHOTS
1	9mm FMJ, lead core	124	1175	3
2	.357 Magnum, JSP	158	1250	3
3	Colt .44 Magnum, SWC	240	1350	3
4	.30 Cal Rifle, Soft Point	180	2540	1
5	7.62mm FMJ, lead core	150	2750	1
6	9mm FMJ, lead core	124	1400	5
7	5.56mm FMJ, lead core	55	3080	5
8	7.62mm FMJ, lead core	150	2750	5
9	.30 Cal Rifle, AP rounds	166	2715	1
10	.50 Cal Rifle, mil. ball	709.5	2810	1